




ANCHOR KIT

CONTENTS & INSTALLATION

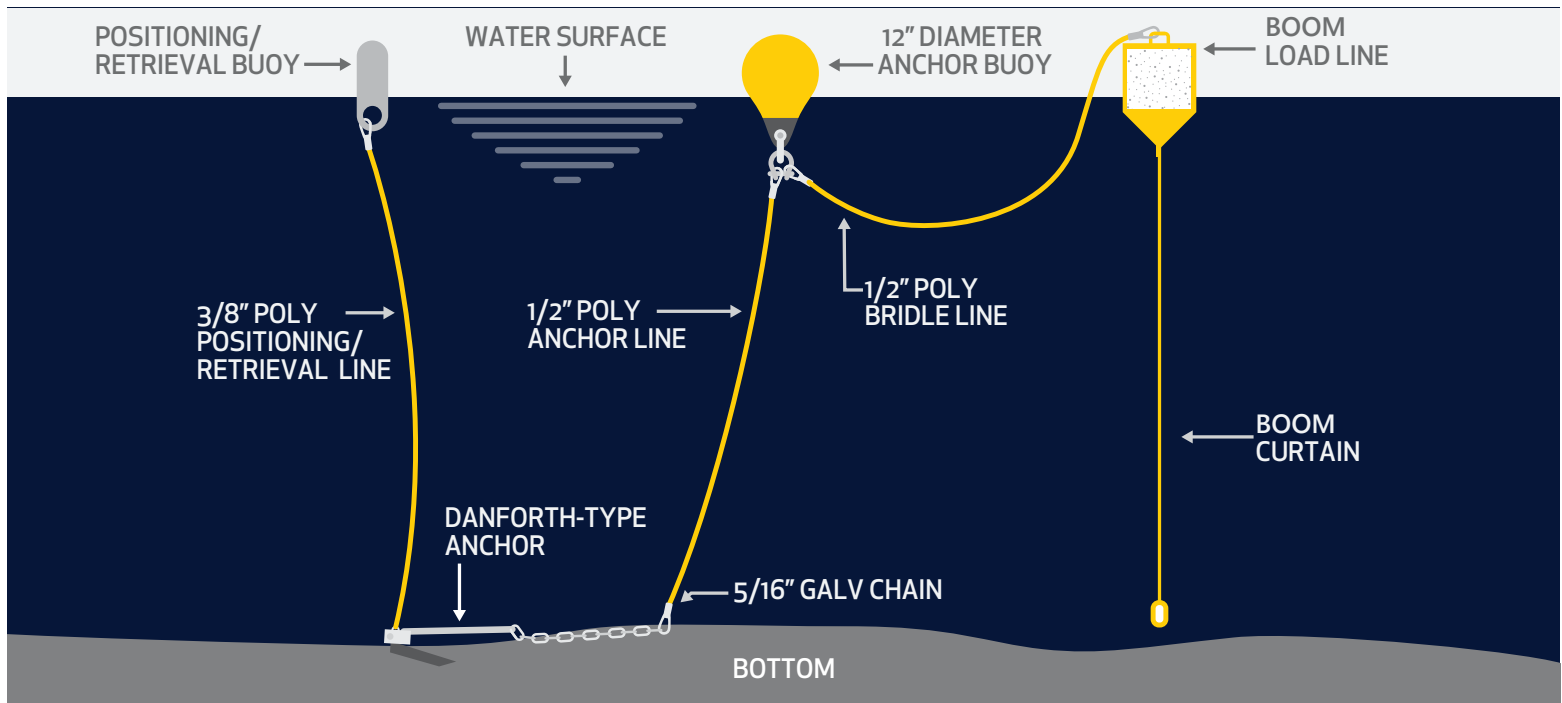

MATERIALS LIST - Each KIT contains the following:

- 1 Anchor - HD Galvanized Steel Danforth-type. Weight depends on depth and stress load. Anchor A: 18 lbs, Anchor B: 25 lbs.
- 1 Anchor Buoy -12" dia. Safety Yellow or Orange Polyvinyl. Heavy Duty Inflatable.
- 1 Anchor Line - 1/2" Yellow Polypropylene Rope. Length correct for specified water depth.
- 1 Bridle Line - 1/2" Yellow Polypropylene Rope. 10' painter.
- 1 Positioning / Retrieval Line - 3/8" Black Polypropylene Rope. Length for specified water depth.
- 1 Anchor Rode Chain - 6' of 5/16" Galvanized Steel Chain.
- 1 Positioning/Retrieval Buoy - Small plastic buoy.
- 4 Thimbles - 1/2" Galvanized. Installed into braided rope end loops.
- 7 Shackles - Drop Forged, Hot Dipped Galvanized. Load Rated. 3 sizes used in each Kit.

Kit is factory assembled. Buoys easily inflate with football needle or compressed air.

TO INSTALL KIT: Simply attach its shackle to cable loop at joint of boom's top load line. Anchor may be positioned and re-positioned by maneuvering the Positioning/Retrieval Line.

Information needed to order proper rope length and anchor: Average water depth at boom location PLUS Average speed (Ft./Sec.) of water current acting on boom.