




TOUGH-GUY CRANBERRY BOOM SPECIFICATIONS

Fabric:	22oz. nominal PVC coated polyester
Base Fabric (100% Polyester)	1500 x 1500 denier 16 x 16 threads/sq in
Weight (FS-191-5041)	22oz./yard ²
Tensile Strength, Grab (ASTMD751-A)	500 lbs x 500 lbs
Tear Strength, Tongue (ASTMD5884)	145 lbs x 145 lbs
Adhesion Strength (ASTM 751)	17 x 17 lbs/inch
Cold Crack Resistance (ASTM 2136)	-40°F
High Temp, Cont/interm. (ASTMD1204)	160/180°F

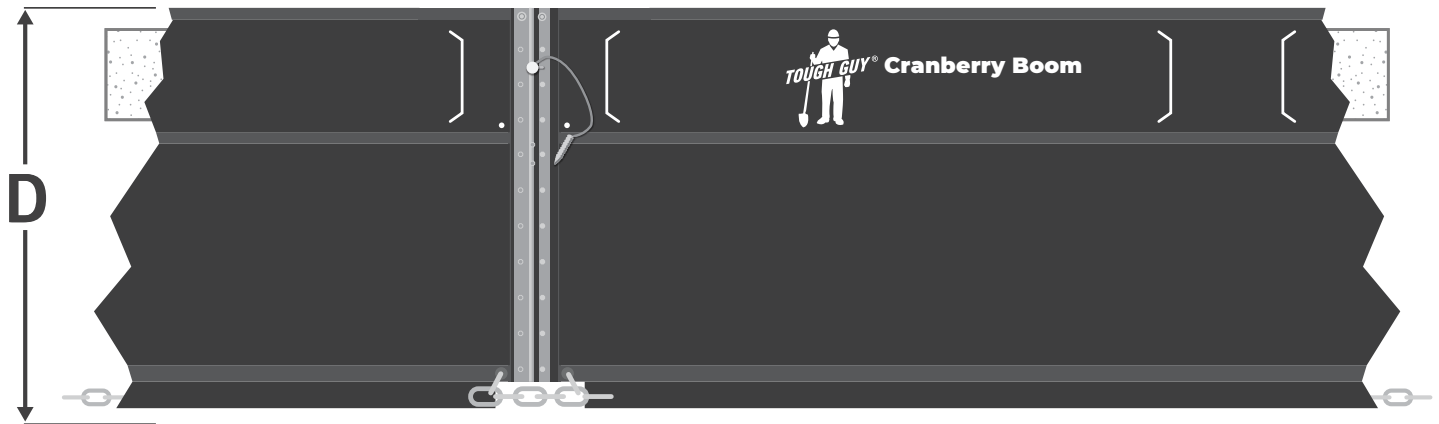

All seams heat sealed
1/4" galvanized chain ballast
ASTM compliant universal end connectors
Polyethylene Foam Log, 4 inch Dia. X 4.5 ft Long
3/8" ASTM locking pin with lanyard

MADE IN THE USA

AER-FLO ENVIRONMENTAL

941.747.4151 | Barriers@AerFlo.com | AerFloEnv.com