


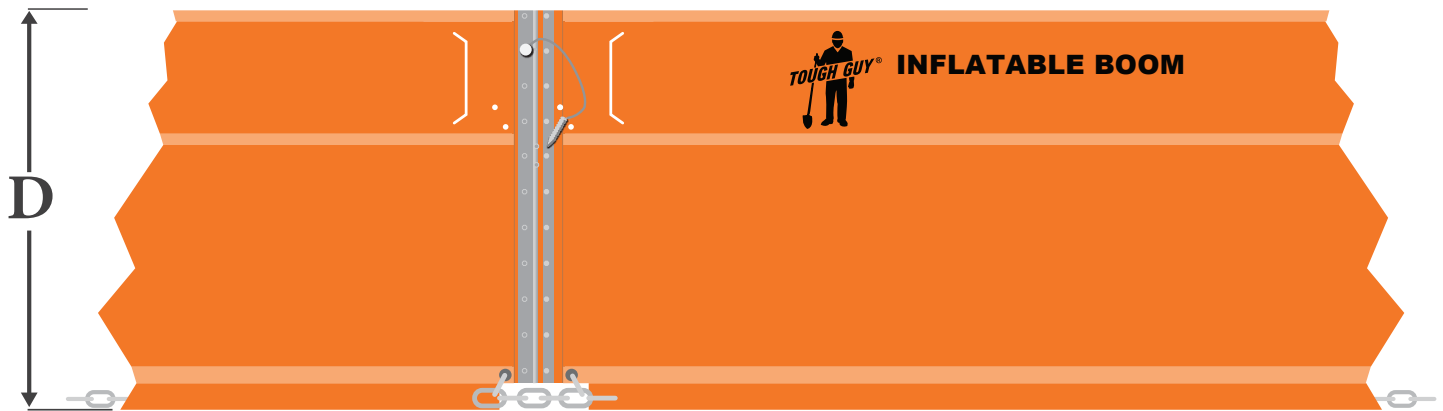

TOUGH-GUY INFLATABLE BOOM SPECIFICATIONS

Fabric: 22oz. nominal PVC coated polyester
Base Fabric (100% Polyester)
Weight (FS-191-5041)
Tensile Strength, Grab (ASTMD751-A)
Tear Strength, Tongue (ASTMD5884)
Adhesion Strength (ASTM 751)
Cold Crack Resistance (ASTM 2136)
High Temp, Cont/interm. (ASTMD1204)

1500 x 1500 denier 16 x 16 threads/sq in
22oz/yard²
500 lbs x 500 lbs
145 lbs x 145 lbs
17 x 17 lbs/inch
-40°F
160/180°F

All seams heat sealed

3/8" galvanized chain ballast

ASTM compliant universal end connectors

3/8" ASTM locking pin with lanyard



MADE IN THE USA

AER-FLO ENVIRONMENTAL

941.747.4151 | Barriers@AerFlo.com | AerFloEnv.com